

DENMARK

Close Window



[→ See All Eaton 5S UPS Documentation](#)

[→ Back to Family Page](#)

5S550i

Eaton 5S 550i

General

Teknologi	Line-Interactive (AVR with Booster + Fader)
Configuration	Tower or under monitor
Part Number	5S550i
Color	Black
Rating (VA/Watts)	550/330
Dimensions (H x W x D, mm)	250 x 87 x 260
Weight (kg)	4.96
Warranty	2 years warranty including batteries

Electrical Input

Connection (1) IEC-320-C14




Input Voltage Range 175V-275 V
 Spænding 230 V
 Operating Frequency 50-60 Hz autoselect


Electrical Output

Nominal Voltage 230 VAC
 Output voltage regulation 230 V +/- 10%
 Output Receptacles (3) IEC-320-C13 (1) IEC-320-C13 surge only



Battery

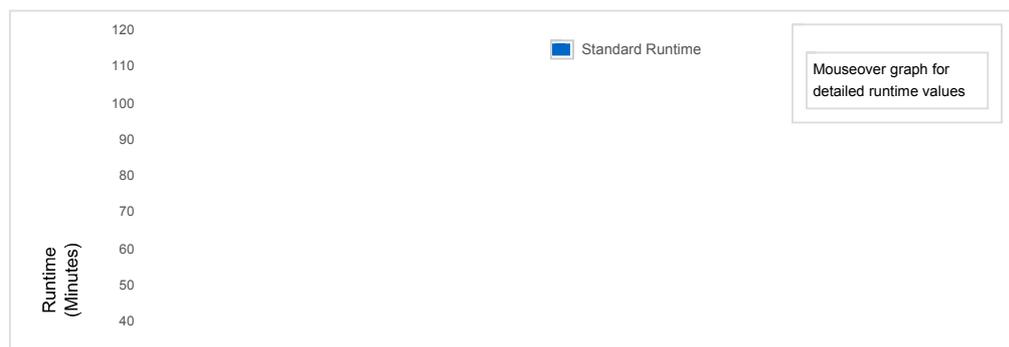

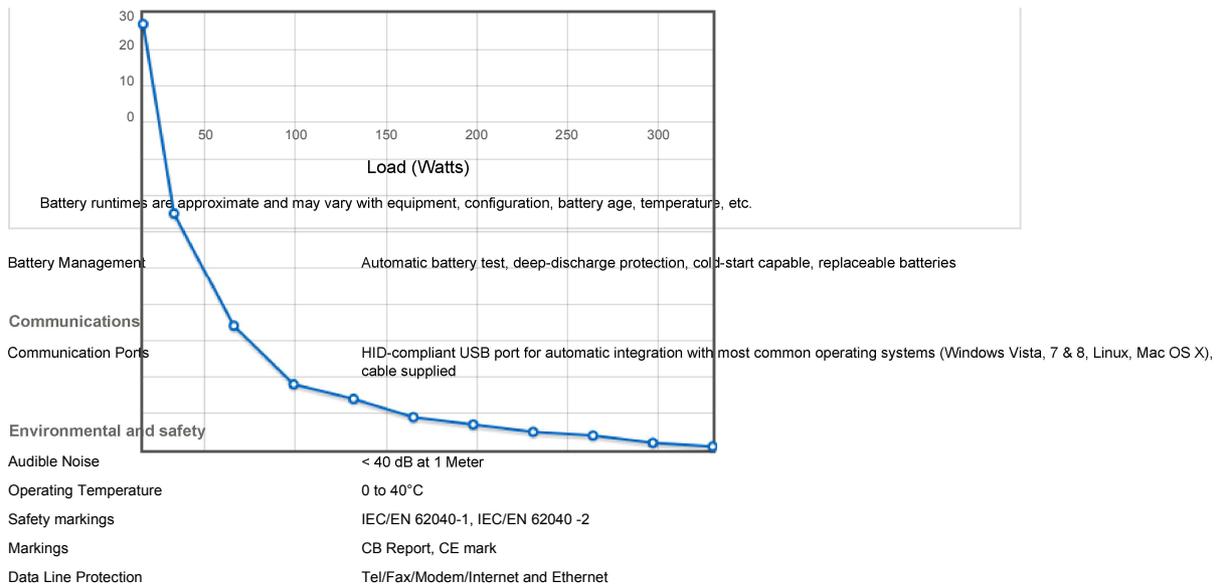

Due to continuing product improvement programs, specifications are subject to change without notice.



[Privacy Policy](#)
[Terms & Conditions](#)
[Copyright](#)

© 2016 Eaton
 All Rights Reserved