



by Schneider Electric

# Metered Rack PDU AP7822B


## Overview

The APC by Schneider Electric Metered Rack Power Distribution Unit (PDU) distributes power to devices in the rack. It has a sensor that measures the current used by the Rack PDU and its attached devices. It can be monitored through Web, Telnet, SNMP, SSH, or StruxureWare Data Center Expert<sup>®</sup> interfaces.

**Outlets:** The Rack PDU has twelve (12) C13 and four (4) C19 outlets.

**Digital display:** A digital display shows aggregate current being used per bank by the Rack PDU.

**Power cord:** The 12 ft power cord terminates with a IEC 309-32A connector.

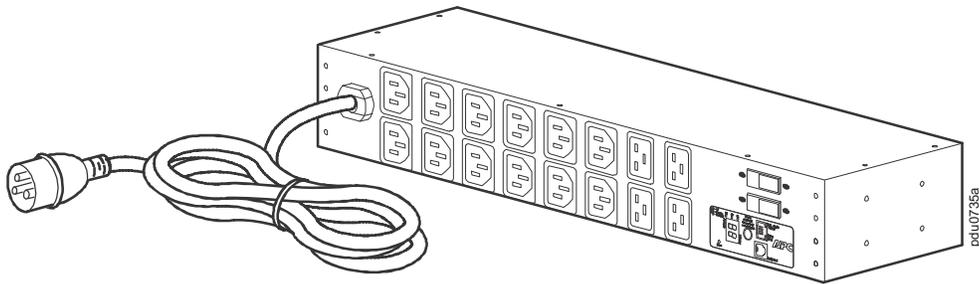

# Specifications

<b>Electrical</b>	
Input connector	IEC 309 - 32A
Cord length	12 ft
Nominal input voltage	230 V
Input frequency	50-60 Hz
Acceptable input voltage	220-240 VAC
Maximum input current total	32A
Nominal output voltage	220-240 VAC
Maximum output current (outlet)	10A (C13), 16A (C19)
Maximum output current (bank)	16A
Output connectors	(12) C13, (4) C19
Overload protection	2 Single Pole 16A Breakers
<b>Physical</b>	
Dimensions (H x W x D)	3.48 x 17.47 x 4.41 in (8.83 x 44.37 x 11.20 cm)
Shipping dimensions (H x W x D)	5.50 x 20.00 x 14.50 in (13.97 x 50.80 x 36.83 cm)
Weight	7.40 lb (2.76 kg)
Shipping weight	11.90 lb (4.44 kg)
<b>Environmental</b>	
Elevation (above MSL) Operating Storage	3000 m (10,000 ft) 15 000 m (50,000 ft)
Temperature Operating Storage	-5 to 45° C (23 to 113° F) -25 to 65° C (-13 to 149° F)
Humidity Operating Storage	5-95% RH Non-condensing 5-95% RH Non-condensing
<b>Compliance</b>	
Safety	VDE, CE, EAC
EMC	EN55022, EN55024, CISPR22

Customer support and warranty information are available at [www.apc.com](http://www.apc.com).

© 2016 APC by Schneider Electric. All rights reserved.

990-5817  
9/2016